


GEARLESS - SGS/SG

For conventional plants

Roping 2 : 1

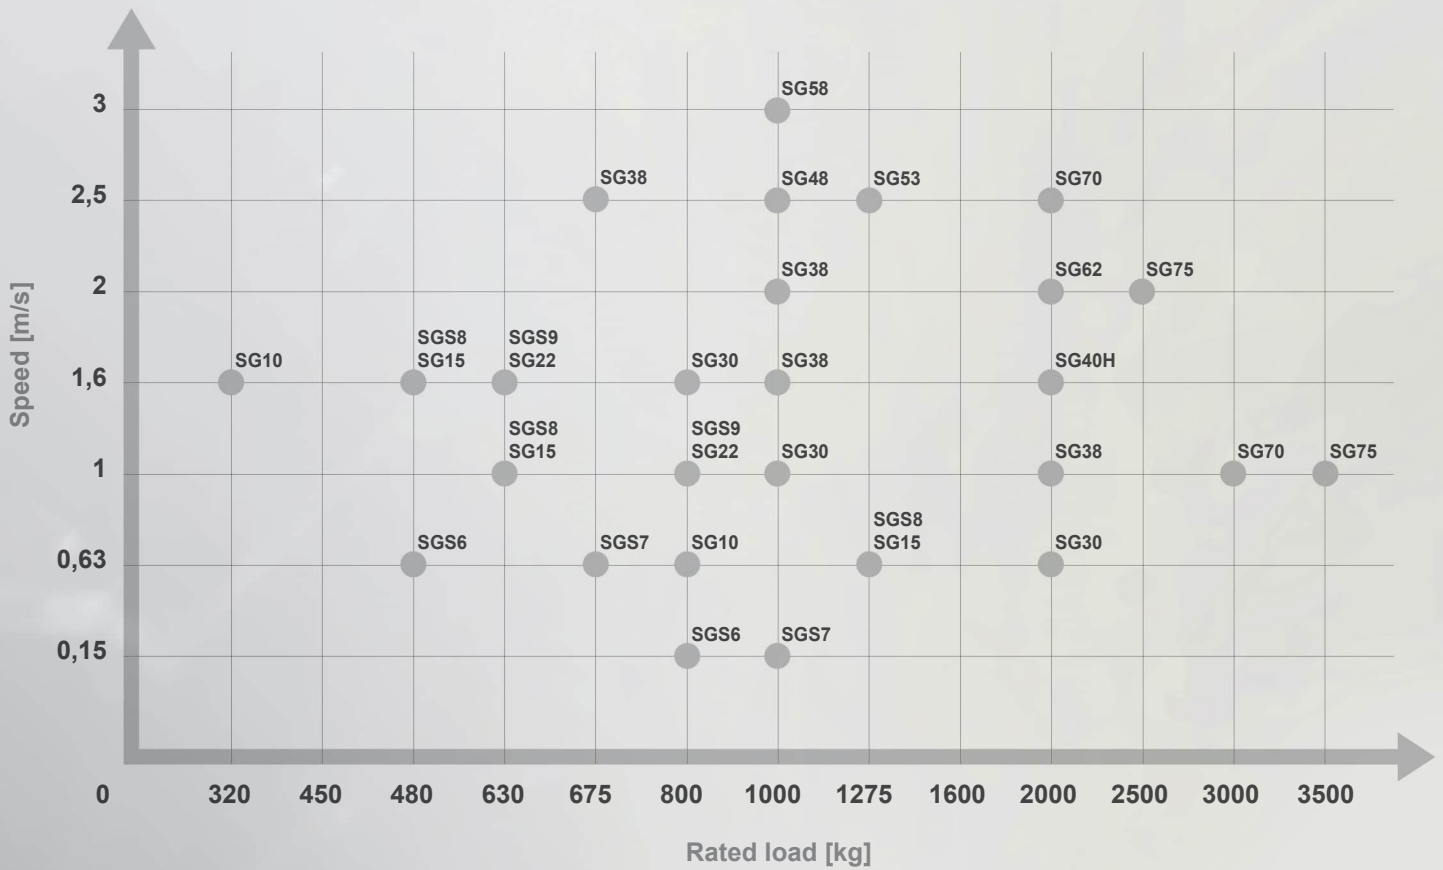

The production range of Sicor gearless machines covers loads up to 3500 in roping 2:1, speeds of up to 4m/s (other speed on request) with traction sheaves from 120 to 600mm.

Since 2015, the gearless range has been implemented with central sheave machines to systems with cantilever arches, gauges guides and reduced headrooms.

Numerous special versions and options are available on request.